




AD.CT.1250

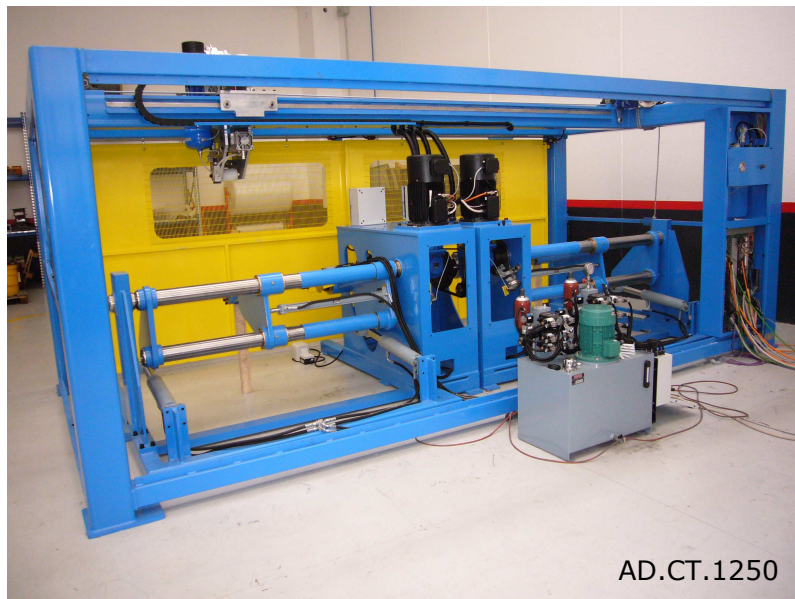

AD.CT.1250

Avvolgitore a cantilever doppio affiancato <i>Dual reel cantilever take-up</i>	AD.CT....	1000	1250
Diametro bobina max. / <i>Reel flange max. diameter</i>	mm	1000	1250
Diametro bobina min. / <i>Reel flange min. diameter</i>	mm	600	600
Larghezza bobina max. / <i>Reel max. width</i>	mm	750	950
Larghezza bobina min. / <i>Reel min. width</i>	mm	300	300
Peso bobina max. / <i>Reel max. weight</i>	kg	3000	4000
Passo di avvolgimento max. / <i>Cable guide max. pitch</i>	mm	20	30
Velocità max. menabrida / <i>Catch plate max. speed</i>	rpm	550	450
Potenza motore / <i>Motor power</i>	kW	11	11
Coppia max. sull'asse contropunte / <i>Max. torque on tailstock</i>	daNm	50	60

#### Optional :

Gruppo guidacavo con bloccaggio, taglio ed avanzamento semi-automatico del cavo, completo di apparecchiatura elettrica.

#### Optional :

Cable guide unit with semi-automatic cable feed, cutting and clamping system, equipped with driving unit.